



# 12V9.0AH

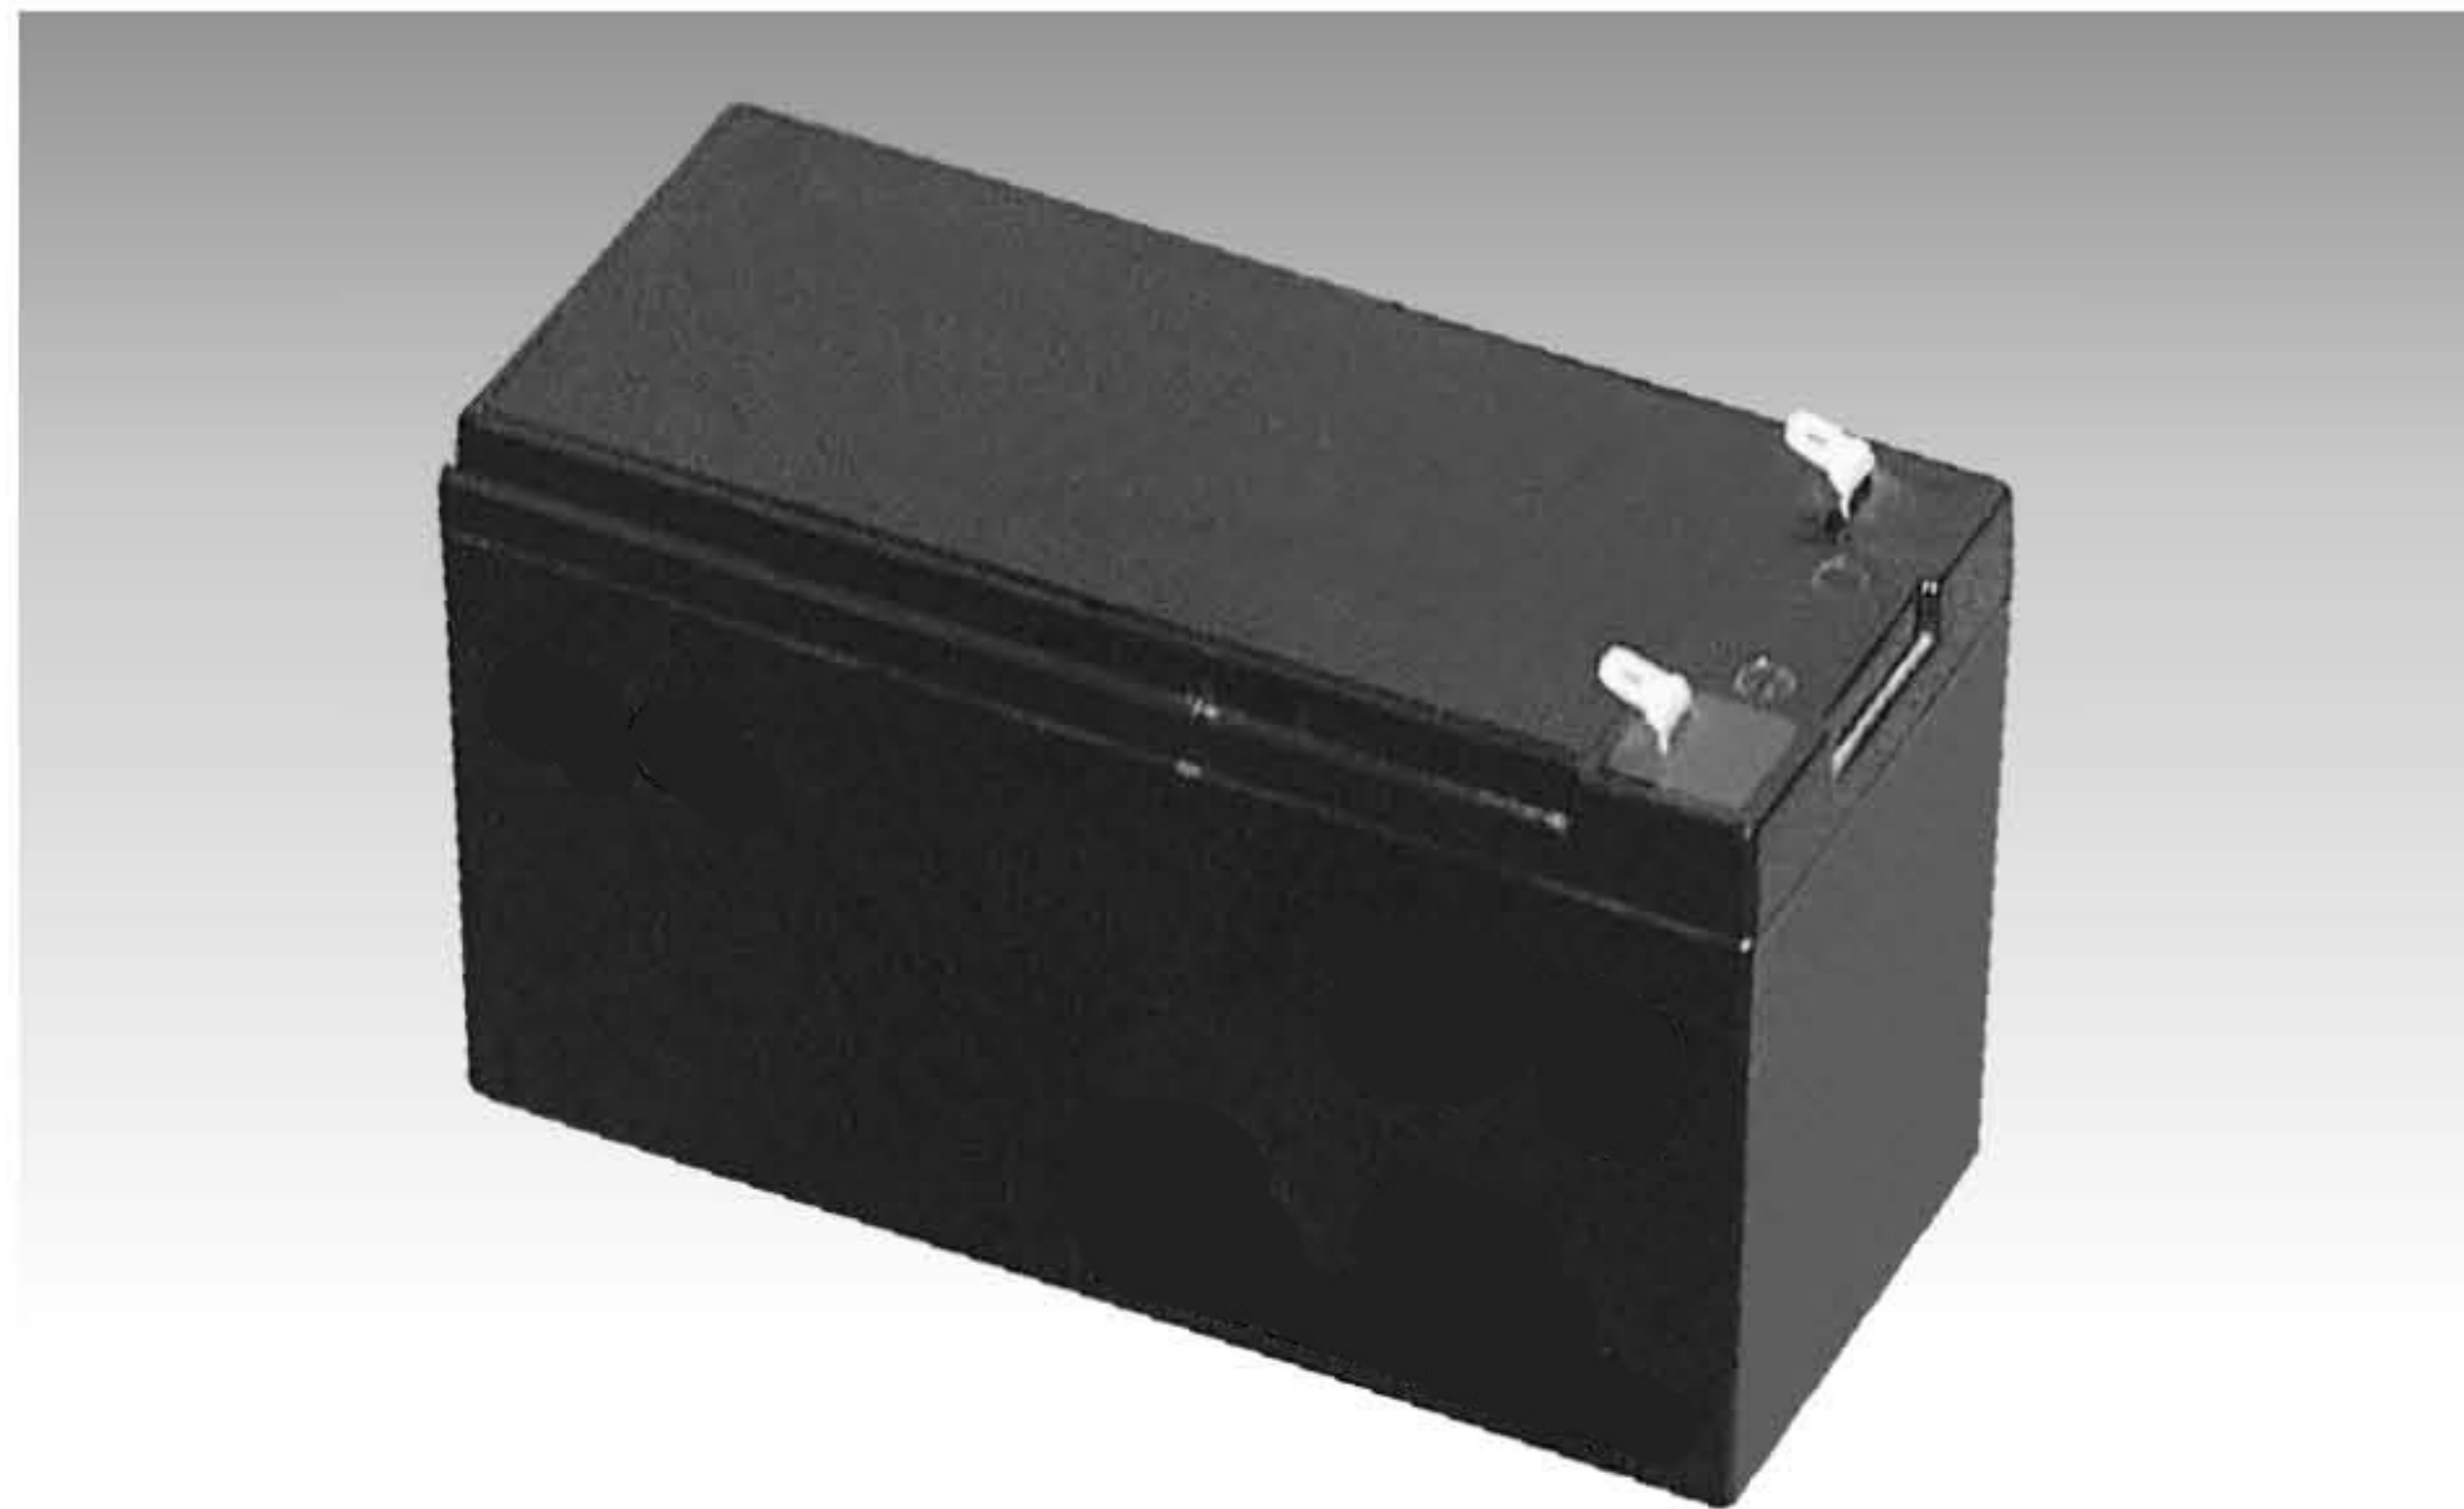


### ● Outer dimensions (mm)

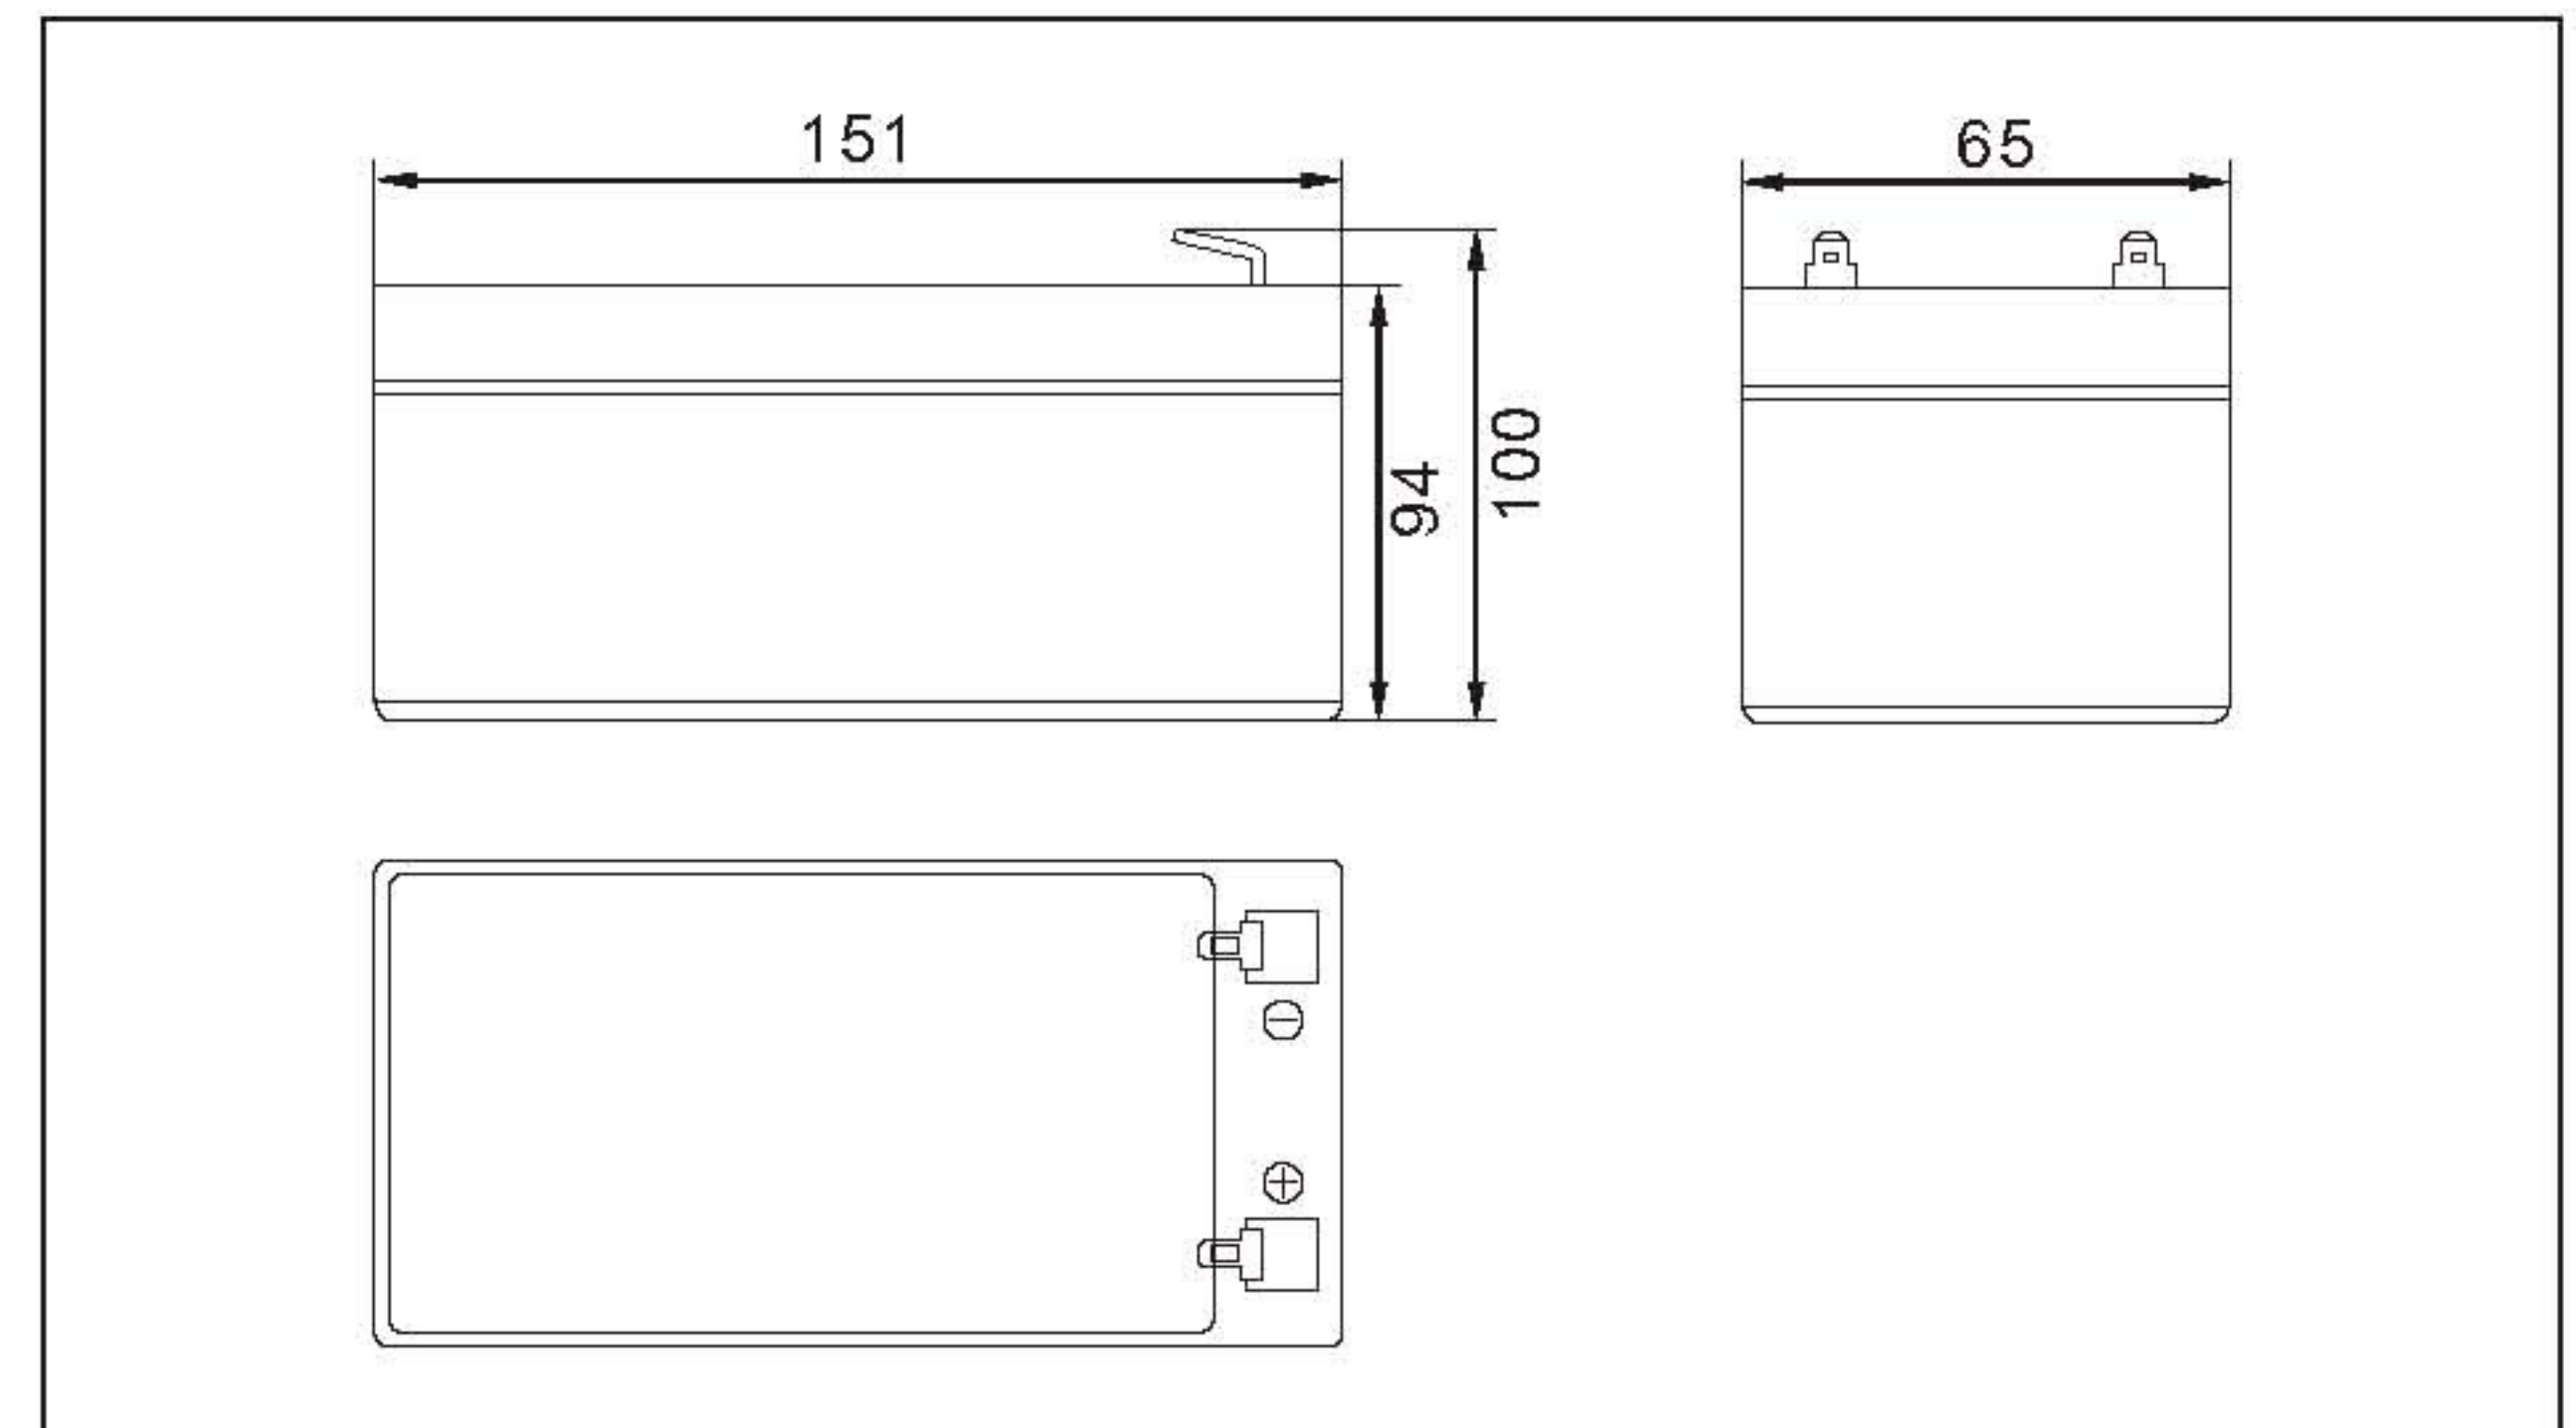

### ● Specifications

Nominal Voltage		12V
Rated capacity (20hour rate)		9.0 Ah
Dimensions	Total Height	100mm (3.94 inches)
	Height	94mm (3.70 inches)
	Length	151mm (5.94 inches)
	Width	65mm (2.56 inches)
Weight Approx		2.78Kg (6.12lbs)


### ● Terminal Type (mm)

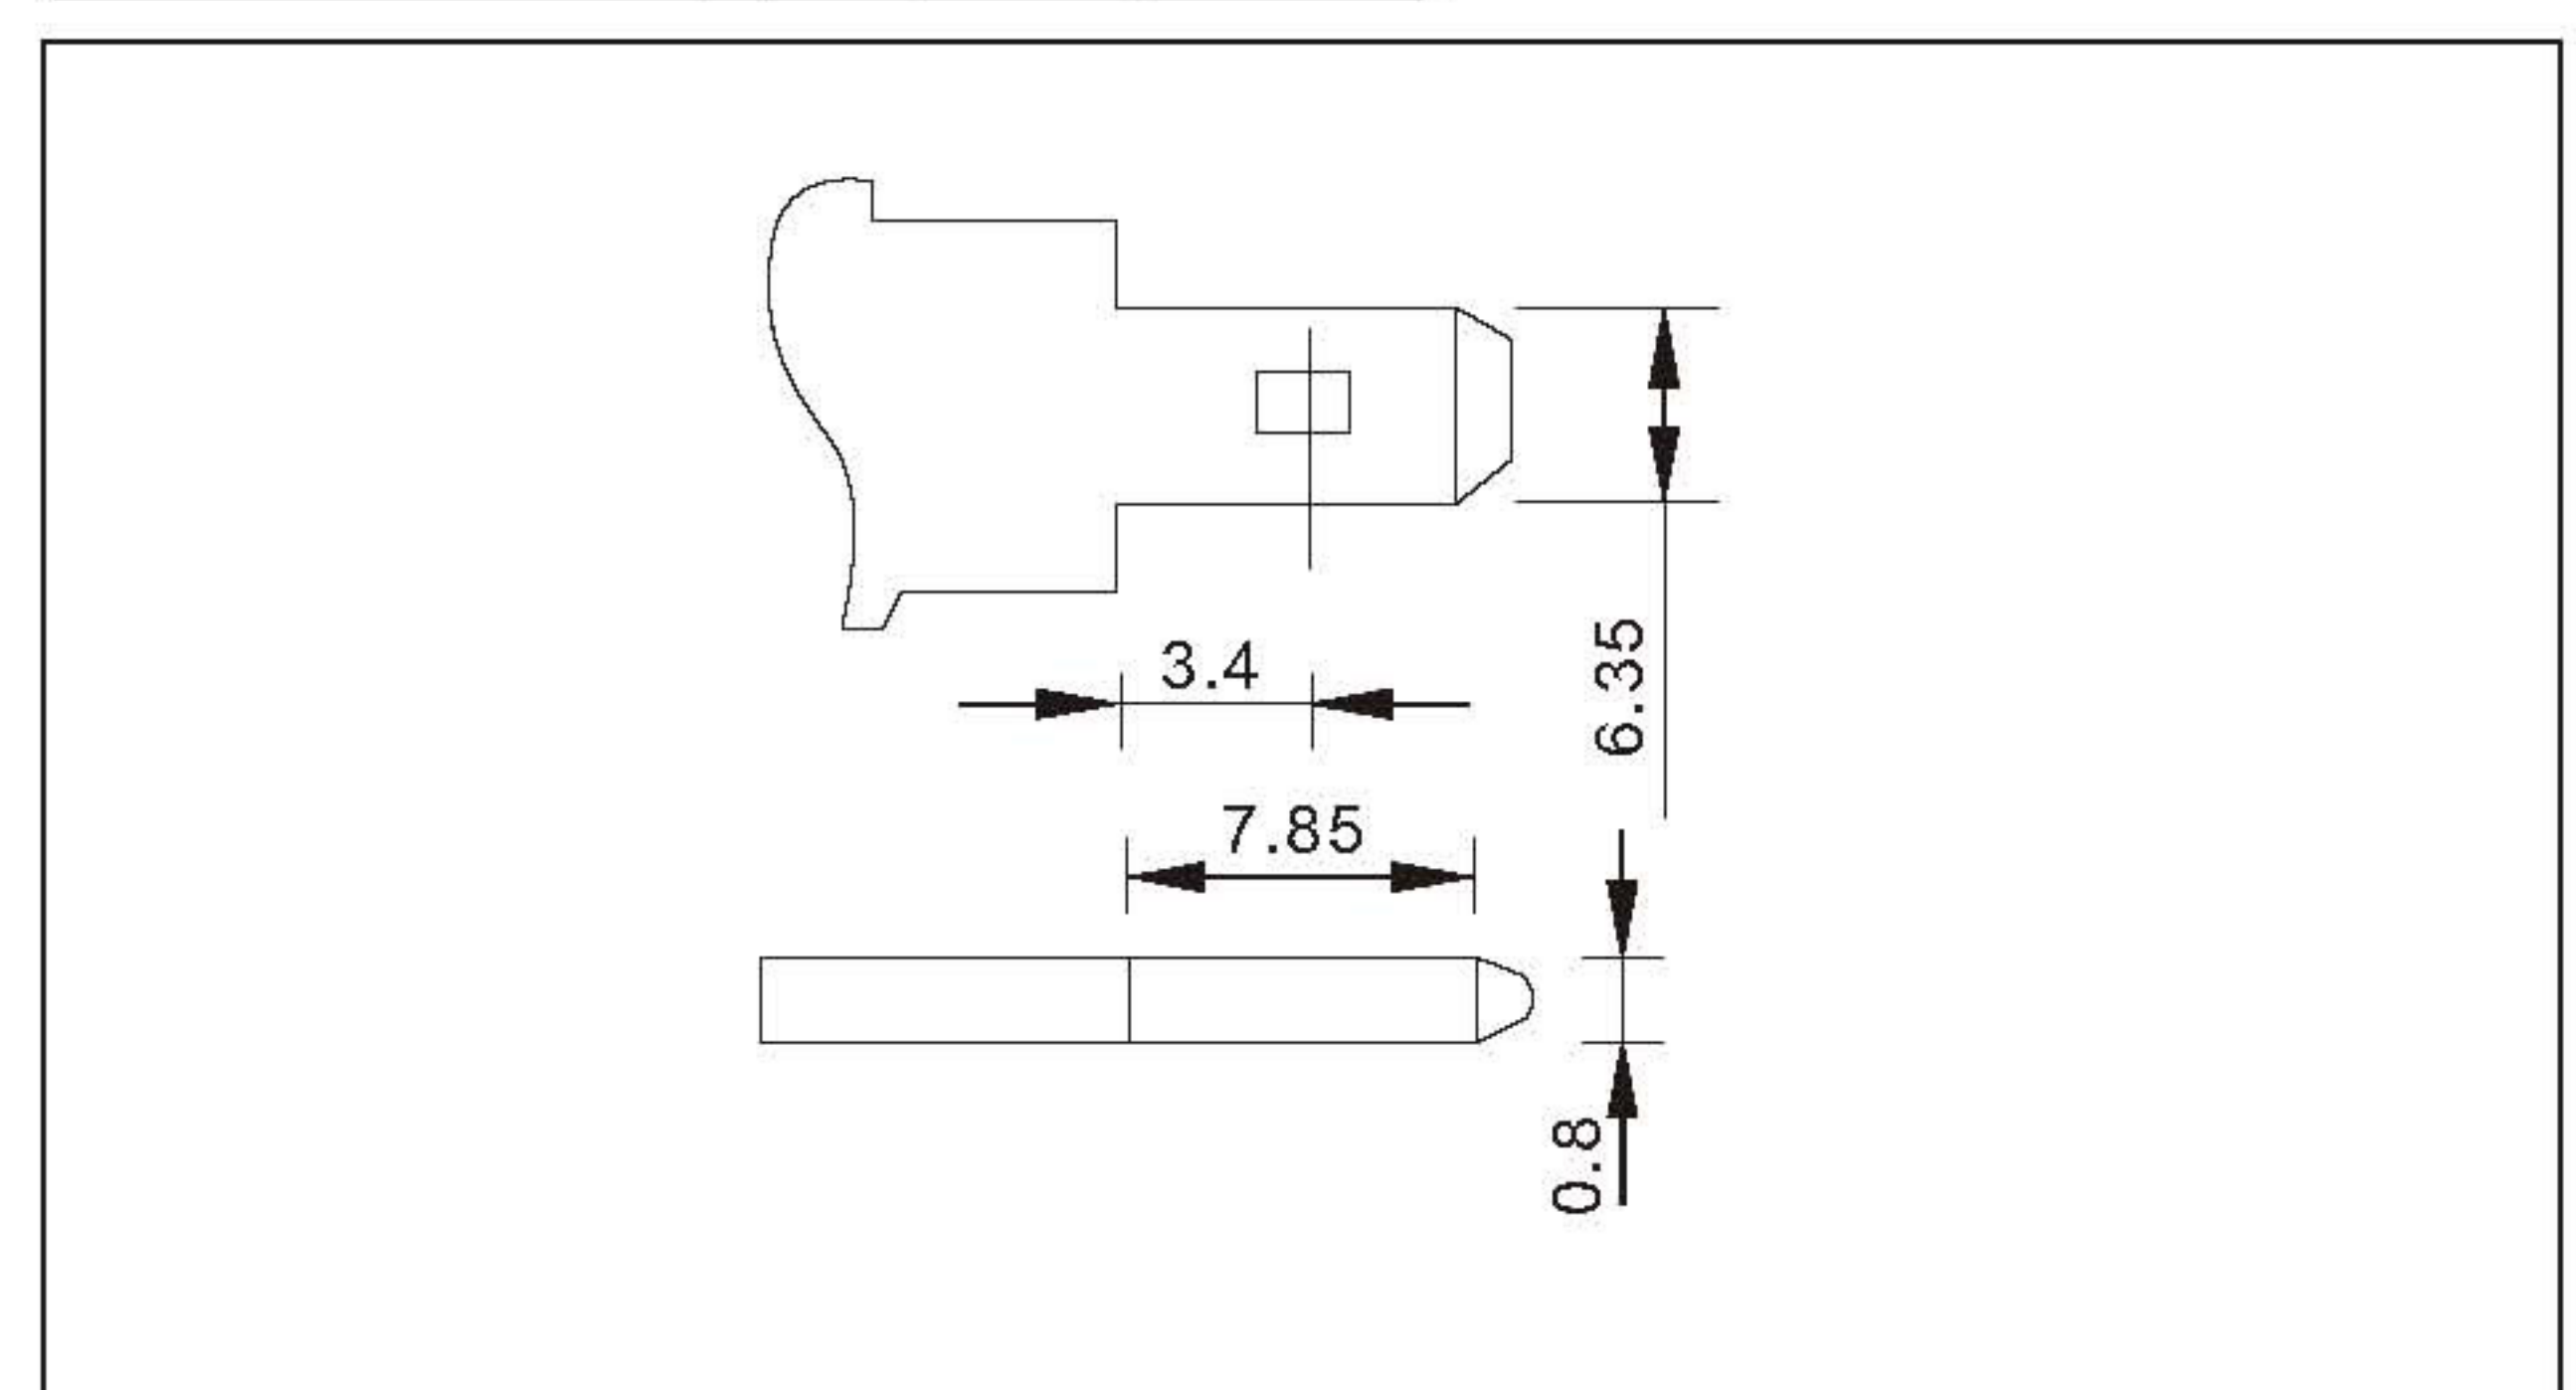

### ● Characteristics

Capacity 25°C(77°F)	20 hour rate(0.45 A)	9.00 AH
	10 hour rate(0.83A)	8.30AH
	5 hour rate(1.53 A)	7.65 AH
	1 hour rate(5.40 A)	5.40 AH
	1.5 hour discharge to 10.5V	3.6 A
Internal Resistance	Full charged Battery at 25°C(77°F)	13m Ω
Capacity affected by Temperature (20hour rate)	40°C(104°F)	102%
	25°C(77°F)	100%
	0°C(32°F)	85%
	-15°C(5°F)	65%
Self-Discharge at 25°C(77°F)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Terminal	T2	
Charge (constant Voltage)	Cycle	Initial Charging Current less than 3.60A Voltage 14.40-15.00V Time 10~12h
	Float	Voltage 13.50-13.80V

### ● Discharge Curves 25°C(77°F)

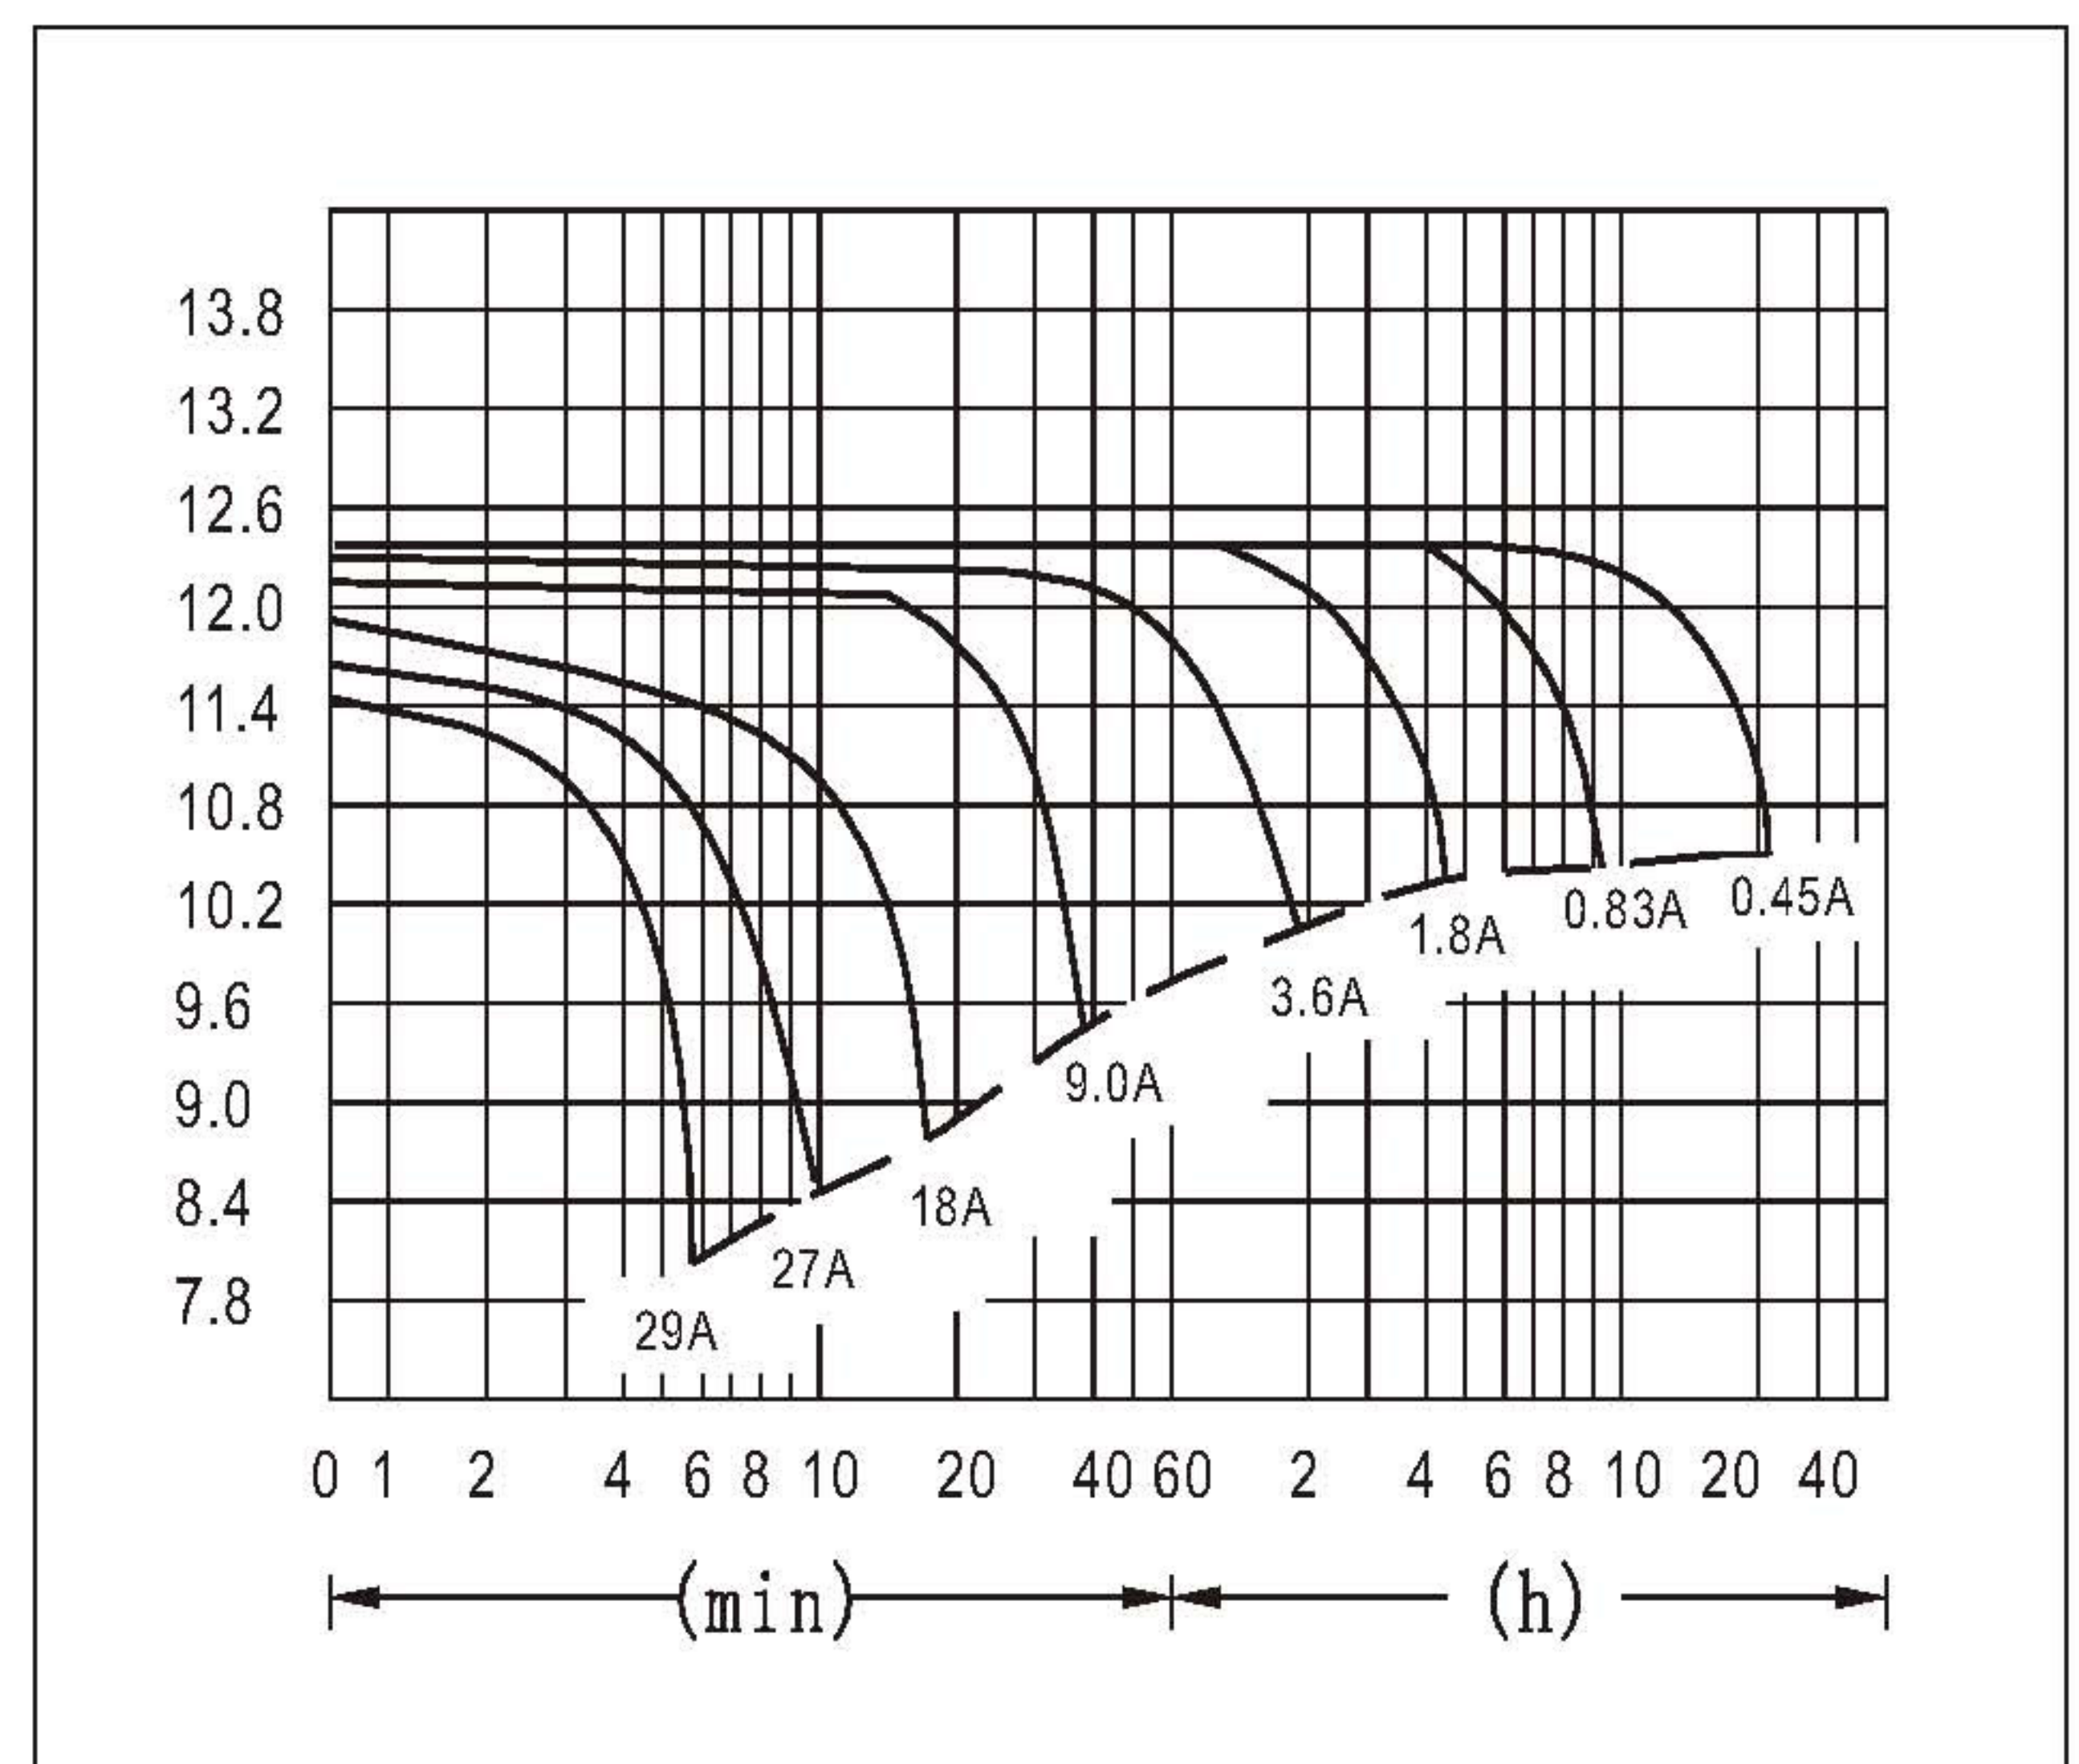

Time		5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9.60V	A	32.4	21.2	15.8	10.35	5.40	3.15	2.32	1.86	1.58	1.04	0.85	0.47
	W	336	228	169	111	58.3	34.6	25.8	20.9	18.0	11.9	9.83	5.41
10.20V	A	29.7	20.3	14.5	9.83	5.07	3.02	2.25	1.80	1.55	1.02	0.84	0.45
	W	319	227	162	110	57.3	34.8	26.1	20.9	18.1	12.0	9.82	5.32
10.50V	A	27.0	19.0	13.5	9.52	4.91	2.96	2.21	1.71	1.53	1.01	0.83	0.45
	W	297	216	154	110	56.8	34.4	25.8	20.0	17.9	11.9	9.80	5.32
10.80V	A	26.0	18.2	12.6	9.26	4.74	2.89	2.18	1.68	1.46	0.99	0.81	0.44
	W	292	209	145	107	55.2	33.8	25.6	19.8	17.3	11.7	9.58	5.23
11.10V	A	24.0	17.1	11.7	9.00	4.57	2.81	2.06	1.65	1.40	0.96	0.79	0.43
	W	273	198	136	105	53.8	33.2	24.5	19.7	16.7	11.5	9.51	5.18